



HAO YU
Since 1980

HAO YU Precision Machinery Industry Co., Ltd.
No. 290, Haiwei Road, Longjing Dist., Taichung City 434, Taiwan
Tel: +886-4-26303998 Fax: +886-4-26301410
E-mail: haoyu@ms12.hinet.net / hy3998@ms12.hinet.net / hy3998@hotmail.com
URL: www.hao-yu.com.tw


CE ISO 9001



HAO YU
Since 1980

CIRCULAR LOOM

Variable Weaving Density
Greater Weft Capacity
Maximum Productivity

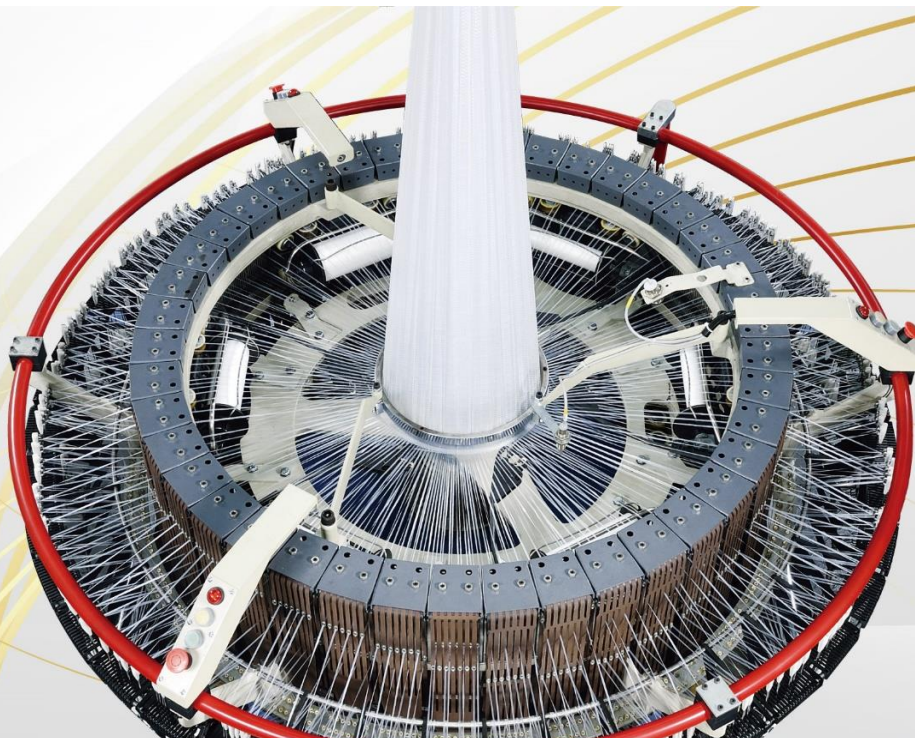

HAO YU
Since 1980

CIRCULAR LOOM

Hao Yu Precision Machinery Industry Co., Ltd. is a special and professional manufacturer of PP, HDPE & PET woven bag machinery and whole-plant equipment. Since its establishment 1980, **HAO YU** has been dedicated to the research and development of high performance machinery. Our dedication to continuous research and development is the reason for the excellence of **HAO YU** machines. Our objective is to enhance our present machinery and develop new models that improve the efficiency, product quality and profitability for our customers.

From the beginning, **HAO YU** has focused its energy on the development of advanced woven bag making machines, incorporating the latest ideas in technology. **HAO YU** machines have been supplied to over 100 countries and have received the full satisfaction of our customers. This level of dependability is achieved through outstanding engineering efficiency, continuous research & development, and rigorous quality control, combined with our strong commitment to customer services. In addition, our engineering ability has earned us "The 3rd R.O.C. Golden Dragon Award". However we never stop improving our technology. The future and continuous success of **HAO YU** depends upon further servicing our customers with high quality machines that fully meet their requirements.




HAO YU

HAO YU Precision Machinery Industry Co., Ltd.

More than 42 years experience in woven bag equipment field, Hao Yu is pleased to present the most advanced circular weaving machines in Taiwan, which offer outstanding features.



www.hao-yu.com.tw

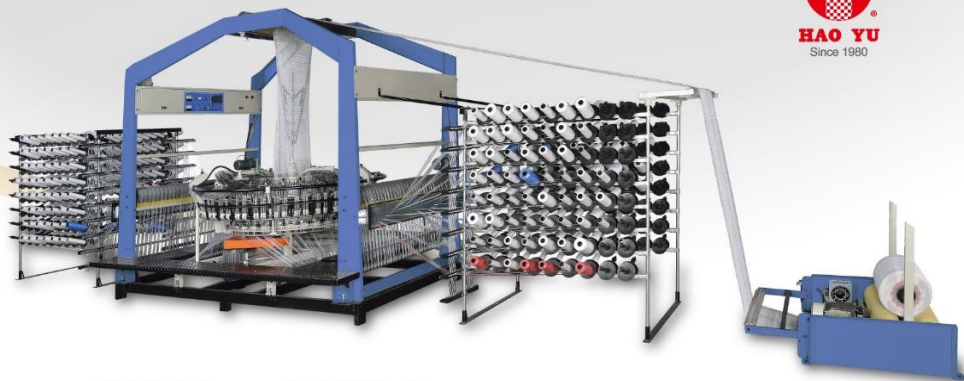

HY7-m4SCLL

Mini Four Shuttles Circular Leno Loom

The HY7-m4SCLL mini four shuttle leno loom is designed for tubular net weaving with PP and HDPE yarns. This is the latest and most unique weaving technology in the world, which features high production and energy-saving characteristics. This leno loom is also possible to be converted into a woven circular loom by applying modification kits. (from HY7-m4SCLL to HY7-m6SCL)

3

SPECIFICATION

- The machine runs with four shuttles to perform tubular weaving at speed up to 380 picks per minute (95 RPM), providing considerable productivity up to 100 m²/hour.
- Equipped with frequency inverter for circular loom speed adjustment; pre-stop weft bobbin sensor before weft tape goes empty. Upon warp and weft run-out/breakage, the machine stops automatically.
- Lubrication-free for cam and shuttle for less energy consumption. It is an advanced circular loom specially designed to meet the stringent productivity requirements in the present days.
- Interchangeable with flat weaving in demand with/without lamination and printing.

Model	Unit	HY7-m4SCLL
Revolutions	PPM	Up to 380
Working range	cm	35-80
Shuttles	pcs	4
Warp (standard)	pcs	560
Weaving density	pick/inch	4-6
Max. weft diameter	mm	ø110
Drive motor	HP	3
Winder motor	HP	1/4
Layout	M	9x2.7x2.8
Weight	kg	1800
Bobbin size	As per customer requirement	

Design and specifications are subject to change without prior notice.



4



HY7-m6SCL+ HY7-m6SCL1/HY7-m6SCL1

Mini Six Shuttles Circular Loom

Designed for making tubular woven fabric cloth by PP/HDPE/PET flat yarn and its working range is from 350 - 850mm and 800-1300mm. Equipped with inverter for main driving motor and weft bobbin sensor ensures fine quality woven products. Gussetting device, center unfold device, both sides heat slitting device, ultrasonic slitting device, warp infeed motor and Multi-language HMI control can be supplied as per customer requirement.

5

SPECIFICATION

- Low spare part consumption & easy maintenance
- Energy saving nearly 50% over conventional models
- Large weft yarn insertion capacity up to 1200PPM (max) and 800PPM (max)
- Flat yarn applicable weaving denier from 500-1200 (standard)
- Large weft yarn carriage capacity up to Ø115mm (max)
- Equipped with European inverter for main motor
- Lubrication-free for shuttle & cam

Optional Accessories

- Gussetting device.
- Both sides heat slitting device and additional fabric winder.
- Center unfold device with heat slitting device and extra large unwinder for cement bag industry.



Model	Unit	HY7-m6SCL+	HY7-m6SCL	HY7-m6SCL1
Revolutions	PPM	Up to 1200	Up to 1100	Up to 800
Working range	cm	35-85	35-85	80-130
Shuttles	pcs	6	6	6
Warp (standard)	pcs	588/672	600/720	1008/1152
Weaving density	pick/inch	8-14 applicable	8-14 applicable	8-14 applicable
Max. weft diameter	mm	ø115	ø110	ø110
Drive motor	HP	5	5	5
Layout	M	10.8x2.5x2.9	10.8x2.5x2.9	12x2.8x2.8
Weight	kg	2000	1800	2500
Bobbin size	As per customer requirement			

Design and specifications are subject to change without prior notice.



6



HY7-m8SCL

Mini Eight Shuttles Circular Loom


Our circular looms are designed for weaving tubular woven fabric by using PP/HDPE/PET flat yarn and the application mainly for tarpaulin, ground cover & jumbo bag (F.I.B.C.) industries. The working width of HY7-m8SCL is 145-200cm.

SPECIFICATION

- Equipped with inverter for main driving motor and weft bobbin sensor for ensuring fine quality woven products.
- Grommet belt is composite type (Belt + heddle wire)
- Optional devices such as gusseting device, center unfold device, both sides heat slitting device, ultrasonic slitting device, warp infeed motor and HMI control are available for customer requirement.

Model	Unit	HY7-m8SCL
Revolutions	PPM	Up to 640
Working range	cm	145-200
Shuttles	pcs	8
Warp	pcs	Max Up to 2000
Weaving density	pick/inch	8-14
Max. weft diameter	mm	ø110
Drive motor	HP	10
Winder motor	HP	1
Layout	M	12x4x4.5
Weight	kg	6500
Bobbin size		As per customer requirement

Design and specifications are subject to change without prior notice.

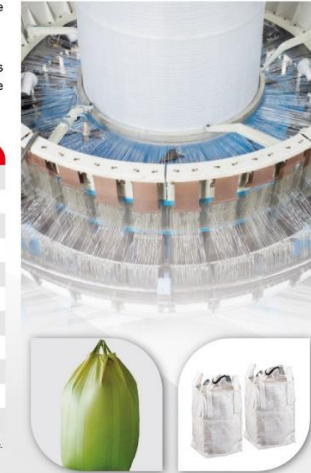

7

8



HY7-8CLA / HY7-12CLA

Eight Shuttles Circular Loom / Twelve Shuttles Jumbo Circular Loom

Our looms can achieve weaving weight per square meter up to 600g by special order requirement. The weaving width capacity is from 180cm to 220cm and 265cm to 305cm(double lay flat width). The fabric strip of weft & warp position (size 5cm(W) x 30cm(L)) has high tenacity up to 500kgs (BY ASTM D5035-95) and the major application is for tarpaulin, ground cover, geotextile, jumbo bags.

SPECIFICATION

- Equipped with inverter for main driving motor and weft bobbin sensor for ensuring fine quality woven products.
- Optional devices such as gusseting device, center unfold device, both sides heat slitting device, ultrasonic slitting device, warp infeed motor and HMI control are available for customer requirement.

Geotextiles Application

Reinforcing of railway, road, and bridge construction, which allows of the strengthening and protection of sloping terrain, river beds and waterfront areas.



Model	Unit	HY7-8CLA	HY7-12CLA
Revolutions	PPM	Up to 560	Up to 360
Working range	cm	180-220	265-305
Shuttles	pcs	8	12
Warp (standard)	pcs	2560	3000
Weaving density	pick/inch	8-16	8-12
Max. weft diameter	mm	ø100	ø100
Drive motor	HP	10	15
Winder motor	Kg / cm	2	2
Layout	M	16x4x4.5	16x5.6x5.3
Weight	kg	7500	9500
Bobbin size		As per customer requirement	

Design and specifications are subject to change without prior notice.



9

10